

Product: BODY ADYNA MINI GPS / LTE

Product Order Code:
BM-02652/260MM

Body Mounted Antenna

GPS, Galileo, QZSS
LTE-4G, CELLULAR (2G, 3G)

- Low profile robust combination antenna
- RoHS 2011/65/EU & RoHS3 (2015/863/EU compliant)
- Request samples for test & evaluation via enquiry@bloomice.com



Technical Data

Dimensions	46.6mm (D) x 16.4mm (H) (Including self adhesive pad)
Weight	48g (Excluding cables and connectors)
Construction Materials	Brass Thread / Nut PC/ABS UL94 V0 / UV Stable
Mounting Arrangement	M12 Split Nut combined with 3M Adhesive Pad Ground Plane Independent - Mount on any surface
Temperature Range	-40 to +85 Degree C
Protection Class	IP68 (IEC 60529)

GPS, Galileo, QZSS

Frequency Range	GPS, Galileo, QZSS:	1575.42MHz +/-1.023MHz
Ceramic Patch Size		25mm x 25mm x 4mm
Impedance		50 Ohm
Polarisation		RHCP
Radiation Pattern		Hemispherical
VSWR		<1.4:1 (All Frequencies)
Active Gain (Amplification)		28dB @ 3v / 30dB @ 5v
Operational Voltage		2.7v to 5.5v
Current Consumption		11mA @ 2.7v / 15mA @ 5v
Power Consumption		28mW (Typical)
Axial Ratio		3dB Maximum
Noise Figure		1.5dB (Typical)
Cable Type / Length		RG174 / 260mm
Connector		SMA MALE with ID label
Test & Measurement Conditions		300mm x 300mm x 2mm Ground Plane 1000mm LL100 Cable / SMA Male connector

Product: BODY ADYNA MINI GPS / LTE

Product Order Code:
BM-02652/260MM

Technical Data (Continued)

Cellular LTE / 2G / 3G


Frequency Range	LTE 700 + GSM 900: GSM 1800: UMTS: LTE (High):	698 - 960 MHz 1710 - 1880 MHz 1920 - 2170 MHz 2300 - 2700 MHz
Impedance		50 Ohm
Polarisation		Linear
Average Gain	LTE 700 + GSM 900: GSM 1800: UMTS: LTE (High):	@ 790-960 MHz; 0dBi @ 1710-1880 MHz; 2.14dBi @ 1920-2170 MHz; 2.14dBi @ 2300-2700 MHz; 2.14dBi
Radiation Pattern		Omni-Directional (individual patterns detailed below)
Max Power @ 30°C	LTE 700 + GSM 900: GSM 1800: UMTS: LTE (High):	50 Watts @ 790-960 MHz 50 Watts @ 1710-1880 MHz 50 Watts @ 1920-2170 MHz 50 Watts @ 2300-2700 MHz
Return loss (VSWR)		≤ 2.2:1 (All Bands)
Radiator Type		Dipole
Cable Type / Length		RG174 / 260mm
Connector		SMA MALE w/ID Label
Test & Measurement Conditions		300mm x 300mm Ground Plane / 1000mm LL100 Cable

dBi: Referenced to an isotropic radiator


Product: BODY ADYNA MINI GPS / LTE

Product Order Code:
BM-02652/260MM

Radiated Efficiency (LTE)

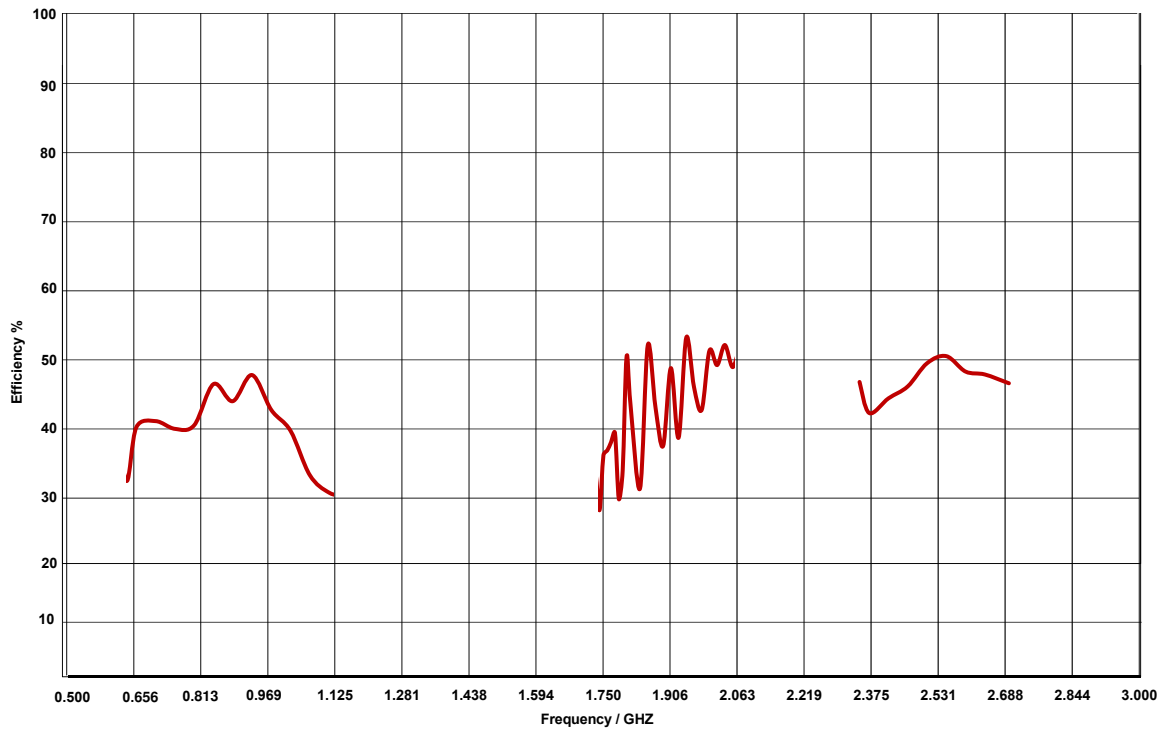

VSWR Data (LTE)

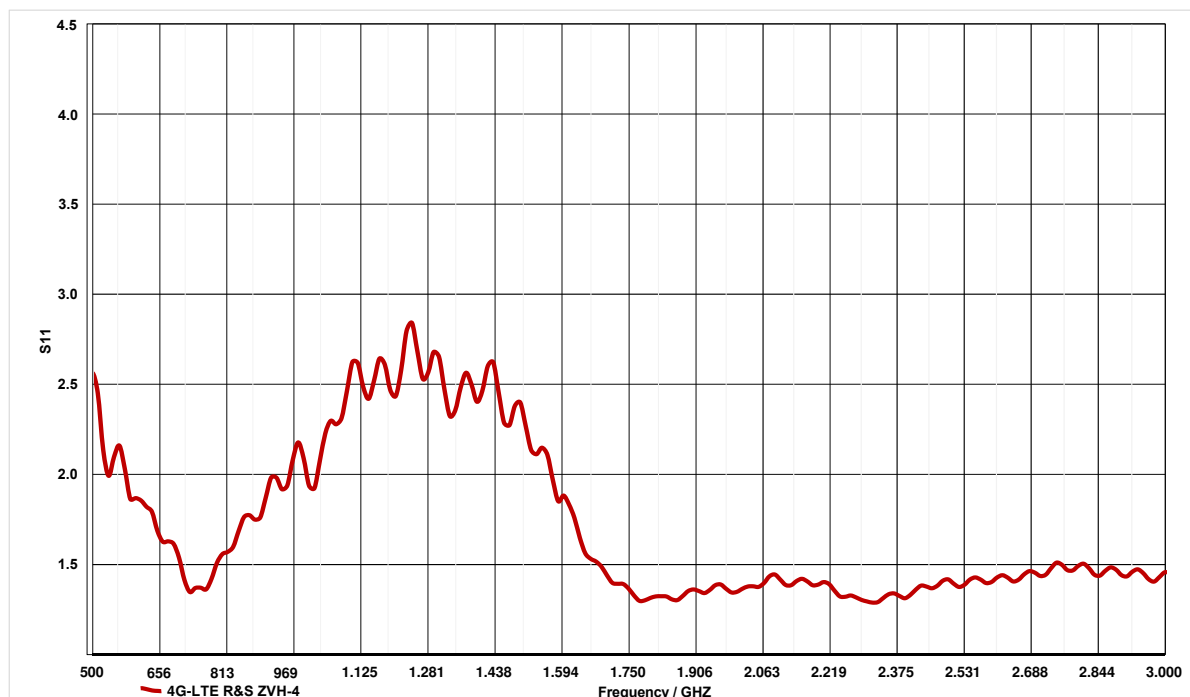

Product: BODY ADYNA MINI GPS / LTE

Product Order Code:
BM-02652/260MM

CAD Data

